


# LED Flood Light

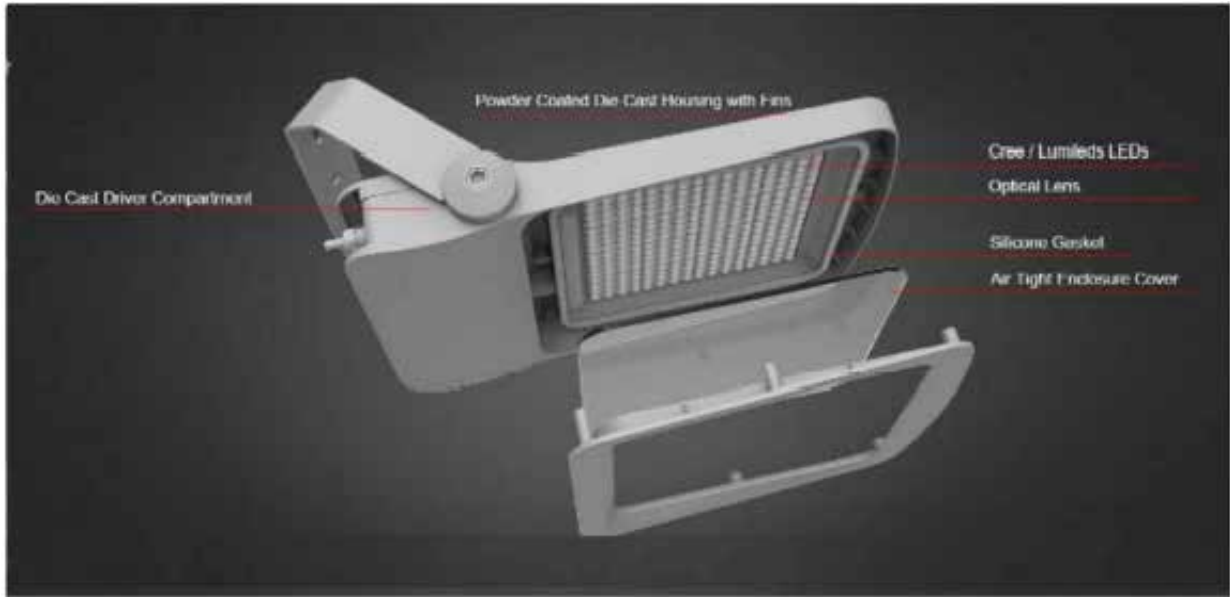

Sl.No.	Model No.	Power(Watt)	Efficacy	Total Lumen	Net Weight	Dimension
01	EL-ARIN-30	30 W	132LPW	3,960lm	3.5kg/17.7lbs	352x370x175 mm 13.9x14.6x6.9 in
02	EL-ARIN-50	50 W	129LPW	6,450lm	3.5kg/17.7lbs	446x370x175 mm 17.6x14.6x6.9 in
03	EL-ARIN-70	70 W	133LPW	9,310lm	5.2kg/11.5lbs	540x370x175 mm 21.3x14.6x6.9 in
04	EL-ARIN-100	100 W	132LPW	13,200lm	5.2kg/11.5lbs	619x410x180mm 24.4x16.1x7.1 in
05	EL-ARIN-150	150 W	130LPW	19,500lm	12.2kg/26.9lbs	713x410x180 mm 28.1x16.1x7.1 in
06	EL-ARIN-200	200 W	130LPW	26,000lm	12.2kg/26.9lbs	910x420x180 mm 35.5x16.5x7.1 in
07	EL-ARIN-300	300 W	133LPW	39,900lm	14kg/30.9lbs	1004x420x180 mm 39.5x16.5x7.1 in
08	EL-ARIN-400	400 W	132LPW	52,800lm	14kg/30.9lbs	1192x420x180 mm 46.9x16.5x7.1 in

## Features:

- Ultra Bright. Up to 192,000lm
- lumen Maintenance: 170,000 Hours (Calculated Using TM-21 Calculator)
- Flexible, Modular Design & Multiple Choice of Optical Lenses & Easy Installation & Maintenance
- Input Voltage 100-277 VAC (347/480 VAC Optional) Dimming Optional
- IP66 & IK08 rated for all outdoor conditions
- Operating & Storing Temperature: -30 to 50°C (-22 to 131 ° F) & -40 to 80°C (-40 to 176°F)
- CCT 4500-5500K (standard) & 2500-6500K (optional)
- LED Chip make : Phillips Lumileds / Cree

